




Superior  
Manufacturing  
Group, Inc.

# 545 Diamond Top Interlock™ Anti-Fatigue/Anti-Slip Matting

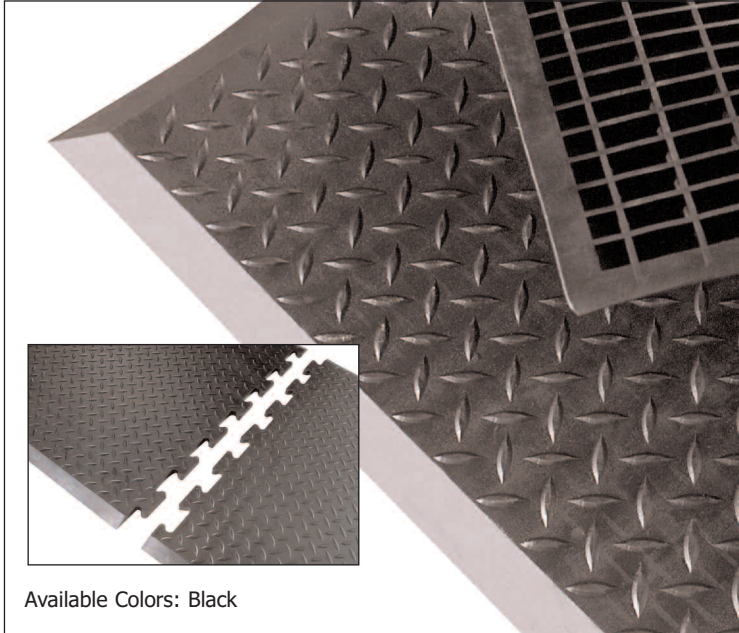

Available Colors: Black

Good Better Best Superior



**D**iamond Top Interlock™ features a rubber diamond plate top surface for traction, and a sturdy waffle support system on the underside for maximum comfort. Offered as a stand alone mat, or as an interlocking continuous length, this mat is perfect for assembly lines, welding areas, picking lines, and other heavy duty dry work areas.

"End"



"Center"



"Single"



Test	Test Description	*Results
Compression Deflection	Test specimen is subjected to varying compression load levels and the resulting deflection was measured. The greater the deflection, the better the anti-fatigue properties. (Inches)	.108" (40 lbs/sq. inch)
Coefficient of Friction ASTM C1028-96	A neolite heel assembly with a predetermined load is pulled horizontally with a dynamometer to measure the force required to cause the assembly to slip.	.80
Abrasion Resistance ASTM D3884-01	Test specimen is subjected to the rubbing action of two abrading wheels under controlled conditions. Results measured in Weight loss (Grams)	(data currently unavailable)
Critical Radiant Flux ASTM E648-94A	The test result is an average critical radiant flux (watts/square cm) which indicates the level of radiant heat energy required to sustain flame propagation in the flooring system.	.51 watts/square cm

\*All testing of NoTrax® floor matting has been performed by an independent testing laboratory.

- Available in three versions:
  - Single workstation mat with beveled borders on 4 sides
  - As a mat with interlocking teeth on 1 end to serve as an "end" mat
  - As a mat with interlocking teeth on both ends to serve as a "center" mat
- Overall thickness: 1/2"
- Stock Sizes: 28" x 31", 36" x 31"



Anti-Fatigue



Welding



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® FOOD SERVICE MATS