




Superior  
Manufacturing  
Group, Inc.

# 920/922 HD Cushion-Lok™ Solid Top Series

Anti-Fatigue/Anti-Slip Matting

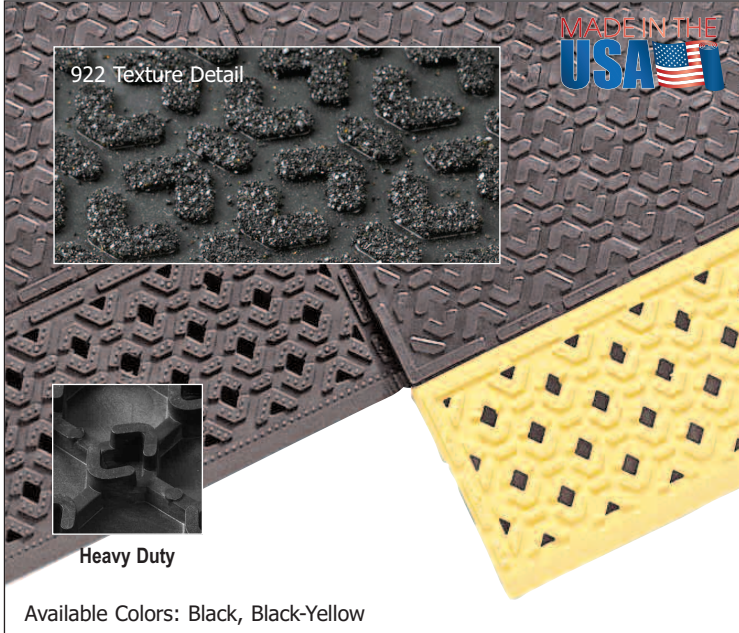

Good Better Best Superior



The Cushion-Lok™ Solid-Top Series is a tough PVC based workstation mat for dry applications where anti-fatigue and anti-slip properties are a necessity. The individual mats can be combined along with beveled ramps making it the perfect solution for custom configurations as well as standalone mats. The 922 model comes with a thick grit coating for additional traction in extremely slippery environments. The 920 series can be interlocked with the 520 (perforated) series for a truly customized configuration.

Test	Test Description	*Results
Compression Deflection	Test specimen is subjected to varying compression load levels and the resulting deflection was measured. The greater the deflection, the better the anti-fatigue properties. (Inches)	.177" (40 lbs/sq. inch)
Coefficient of Friction ASTM C1028-96	A neolite heel assembly with a predetermined load is pulled horizontally with a dynamometer to measure the force required to cause the assembly to slip.	.67
Abrasion Resistance ASTM D3884-01	Test specimen is subjected to the rubbing action of two abrading wheels under controlled conditions. Results measured in Weight loss (Grams)	(data currently unavailable)
Hardness ASTM D2240	The hardness of a test sample is measured by means of a type A Shore Durometer. It measures the penetration of its specified indenter forced into the material under specified conditions	**Shore A - 75
Critical Radiant Flux ASTM E648-94A	The test result is an average critical radiant flux (watts/square cm) which indicates the level of radiant heat energy required to sustain flame propagation in the flooring system.	.83 watts/square cm

\*All testing of NoTrax® floor matting has been performed by an independent testing laboratory.

06-23-97

\*\* Durometer results represent the hardness of the materials used to manufacture specified product. Functional design of finished product may enhance the ergonomic feel of the product, but in no way effects the hardness of the materials used.



- Solid PVC vinyl construction: highly resistant to industrial chemicals
- Made from 100% recycled PVC (black only)
- Raised diamond top surface design adds traction
- Overall thickness: 7/8"
- Six-inch wide beveled ramps are permanently affixed
- 6" beveled ramps permanently affixed on 3 sides
- Stock Sizes: 30" x 36", 30" x 48", 30" x 60", 30" x 72", 30" x 96", 42" x 72", 42" x 96", 42" x 120"



Anti-Fatigue



Anti-Slip



RESULTS FROM INDEPENDENT TEST LABS & PRESENTED AS COMPARISONS TO OTHER NoTRAX® FOOD SERVICE MATS