



Superior  
Manufacturing  
Group, Inc.

# 194 Safety Message Matting

Message Matting



## Specialty



**S**afety Message Mats make your safety message loud and clear while keeping facilities cleaner and safer. Pre-printed message mats warn employees who may be entering a hazardous area, may need special ear or eye protection, or just act as a reminder to think and act safely in work environments. Pre-printed message mats also offer functionality as an entrance mat cleaning dirt and moisture from shoes and keeping facilities cleaner and safer.




Test	Test Description	*Results
Modified Slip Test (Coefficient of friction) ASTM D1894 (modified)	A 2' x 3' mat is tested using the principles of ASTM D1894 but modifying the sample size and static load (50 lbs.). The substrates used are to emulate actual floor surfaces. Results measured represent coefficient of friction	Painted Concrete - 0.65 Epoxy Concrete - 0.63 VCT - 0.72 Vinyl Sheet - 0.55
Accelerated Wear ASTM D5252-05	Using a Hexapod Tumble Drum tester, after a specified number of cycles, the test specimen is assessed for appearance change and color change.	Number of cycles - 4,000 Appearance rating - 3.2 (slight change) Color change rating - 3.0 (moderate)
Breaking load & Elongation ASTM D412-06	Test specimen is tested for tensile strength. Results represent the lbs. per square inch required to break.	225.6 lbs/per sq. Inch
Tuft Bind ASTM D1335-05	This test method is designed to measure the force required to pull a tuft completely out of a pile floor covering. It is applicable for both cut and looped pile construction.	9.0 lbs.
Flammability ASTM D2859 (CPSC FF 1-70)	Intended to measure the matting's response to an ignition source in a controlled environment. The uncharred area of the test specimen must be greater than 1 inch to pass.	3.5 Inches PASS

\*All testing of NoTrax® floor matting has been performed by an independent testing laboratory.

09-30-10



- Face Fiber: Nylon 6,6
- Border Width: 5/8"
- Backing Type: PVC
- Backing Thickness: 70 Mils
- Thickness: 5/16"
- Stock Sizes: 3' x 5', 4' x 6'
- Select messages available in Spanish

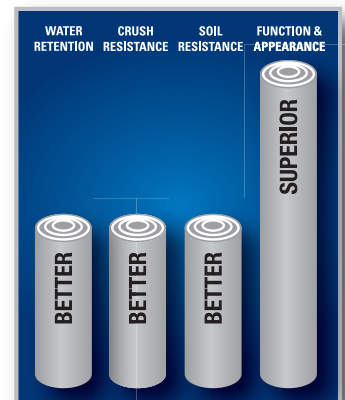

RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS